

3极机械闭锁型接触器

9A ~ 85A

特点

- 3对主触点
- 机械闭锁
- 防触点安全罩设计
- 导轨或螺钉安装
- 可在侧面安装辅助触点
- 可与热过载继电器直接安装



GMC-22L

3极机械闭锁型接触器（交流线圈）

额定电流	AC3 (IEC60947-4)				AC1 Ith	辅助触点 (标准)	型号
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
9A	2.5kW 11A	4kW 9A	4kW 7A	4kW 5A	25A	1NO+1NC	GMC-9L
12A	3.5kW 13A	5.5kW 12A	7.5kW 12A	7.5kW 9A	25A	1NO+1NC	GMC-12L
18A	4.5kW 18A	7.5kW 18A	7.5kW 13A	7.5kW 9A	40A	1NO+1NC	GMC-18L
22A	5.5kW 22A	11kW 22A	15kW 22A	15kW 18A	40A	1NO+1NC	GMC-22L
32A	7.5kW 32A	15kW 32A	18.5kW 28A	18.5kW 20A	50A	1NO+1NC	GMC-32L
40A	11kW 40A	18.5kW 40A	22kW 32A	22kW 23A	60A	1NO+1NC	GMC-40L
50A	15kW 55A	22kW 50A	30kW 43A	30kW 28A	80A	1NO+1NC	GMC-50L
65A	18.5kW 65A	30kW 65A	33kW 60A	33kW 35A	100A	1NO+1NC	GMC-65L
75A	22kW 75A	37kW 75A	37kW 64A	37kW 42A	110A	1NO+1NC	GMC-75L
85A	25kW 85A	45kW 85A	45kW 75A	45kW 45A	135A	1NO+1NC	GMC-85L

接触器线圈电压，AC 50/60Hz

50Hz : 24, 42, 48, 100, 110, 220, 240, 380, 400, 415, 440, 500, 550V
60Hz : 24, 48, 110, 120, 208, 220, 240, 277, 380, 440, 480, 600V

释放线圈电压

AC 50/60Hz : 100(100~127V), 200(200~ 240V), 300(260~350V), 400(380~440V), 500(460~550V)
DC : 12, 24, 48, 100(100~110V), 125(120~125V), 200(200~220V)

订购须知

型号及线圈电压

示例 : GMC-12L 50Hz 240V DC48V

可选附件



AU-1
辅助触点单元
2极，侧装
➔ 92页



热（双金属片）式
➔ 64~66 页



AS
浪涌抑制单元
➔ 96页



电子式
➔ 76~80 页

详细信息


技术说明	➔ 98~99页
尺寸	➔ 130页
回路图	➔ 130页
接触器	➔ 40~45页
热过载继电器	➔ 64~80页

3极机械闭锁型接触器

100A ~ 400A

特点

- 3对主触点
- 机械闭锁
- 交流/直流通用线圈
- 宽线圈电压
- 螺钉安装
- 1NO+2NC 辅助触点为标准配置
- 可在侧面安装附件



GMC-22 L

3极机械闭锁型接触器

额定电流	AC3 (IEC60947-4)				AC1 lth	辅助触点 (标准)	型号
	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V			
100A	30kW 105A	55kW 105A	55kW 85A	55kW 65A	160A	1NO+2NC	GMC-100L
125A	37kW 125A	60kW 120A	60kW 90A	60kW 70A	160A	1NO+2NC	GMC-125L
150A	45kW 150A	75kW 150A	90kW 140A	90kW 100A	210A	1NO+2NC	GMC-150L
180A	55kW 180A	90kW 180A	110kW 180A	110kW 120A	230A	1NO+2NC	GMC-180L
220A	75kW 250A	132kW 250A	132kW 200A	132kW 150A	275A	1NO+2NC	GMC-220L
300A	90kW 300A	160kW 300A	160kW 250A	200kW 220A	350A	1NO+2NC	GMC-300L
400A	125kW 400A	220kW 400A	225kW 350A	250kW 300A	450A	1NO+2NC	GMC-400L

接触器线圈电压,AC/DC通用

24, 48, 100/200, 300, 400, 500V (GM-100,125,150,180,220)

100/200, 300, 400, 500V (GM-300, 400)

标称电压	AC 50/60Hz	DC
24V	24 - 25V	24V
48V	48 - 50V	48V
100/200V	100 - 240V	100 - 220V
300V	265 - 347V	-
400V	380 - 450V	-
500V	440 - 575V	-

释放线圈电压


AC 50/60Hz : 100(100~127V), 200(200~ 240V)

订购须知

型号及线圈电压

示例 : GMC-100L 100/200V AC100V

可选附件

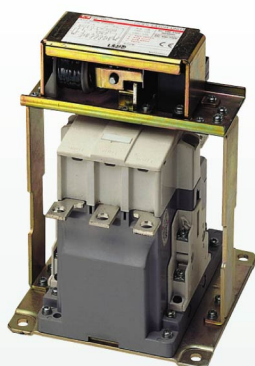

热（双金属片）式
➔ 67~69页



AU-100
辅助触点单元
2极，侧装
➔ 92页



AS
浪涌抑制单元
➔ 96页



端子盖
➔ 95页



AI
绝缘隔板
➔ 96页

详细信息

技术说明	➔ 98~99页
尺寸	➔ 131页
回路图	➔ 131页
接触器	➔ 46~51页
热过载继电器	➔ 62~80页